
## **Drawings**

## Model YVP110 Advanced Valve Positioner (Single Acting Type)

77(3.0) 80(3.1) 117(4.6) 60(2.4) 76(3.0) 64(2.5) 35 Pressure Gauge Electrical Connection\*1 Shaft (1.3) (Optional) (with blind plug) (0.7)(1.8) 45 1.5) (1.5) 60(2.4) 39 33 09(4.3) Air Supply Connection Out1 Connection 15(0.6) Ground Terminal Electrical Connection 85(3.3) 44 (1.7)54 57 M8×1.25, 11(0.4)-deep \*1: Blind plug for Connection code 1, 5, and 6. (2.1) (2.2) Shaft for Valve Mounting\*3 Details of shaft 0)01 74(2.9) <u>(</u>9 42 20 5 to 6 (0.2 to 0.24 M8×1.25, 20(0.8)-deep Air Supply Connection 45 for Valve Mounting\*2 (with blind plug) (1.8) 15 (0.6) \*2: Attached with 4 mounting bolts (M8, 25 mm) and spring washers (applicable 3 to 6 mm thick brackets). \*3: Available when unable to mount securely with the 4 bolts in \*2.

◆ Lever 1 (Option code /LV1)

◆ Lever 2 (Option code /LV1)

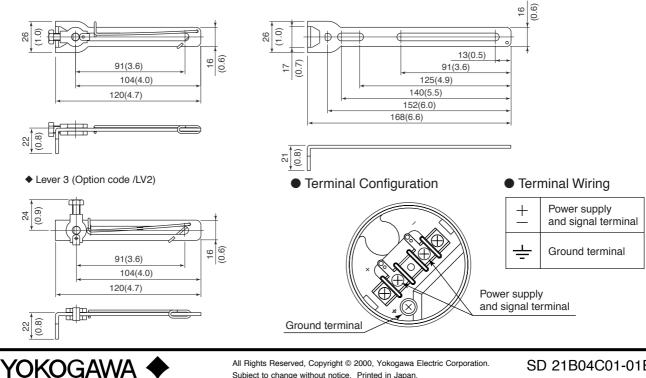

Yokogawa Electric Corporation

Subject to change without notice. Printed in Japan.

Unit: mm(approx. inch)