



Characteristics

Seat valves series D4S are designed for directional control functions. A large variety of poppets, springs and covers – including shuttle valves, stroke limiters, solenoid valves (VV01) and position control – allow to design individual hydraulic solutions for nominal flow up to 600 l/min. A complete program of 2/2-way seat valves is offered under Parker brand:

- subplate mounted valves series D4S chapter 6
- SAE flange valves series D5S chapter 9
- slip-in cartridges series CAR on request





Features

- Subplate mounting according to ISO 5781
- Leak-free seat valve design
- Numerous pilot options
- 6 poppet types
- D4S03 - NG10
- D4S06 - NG25
- D4S10 - NG32

6

D4S10-9DC

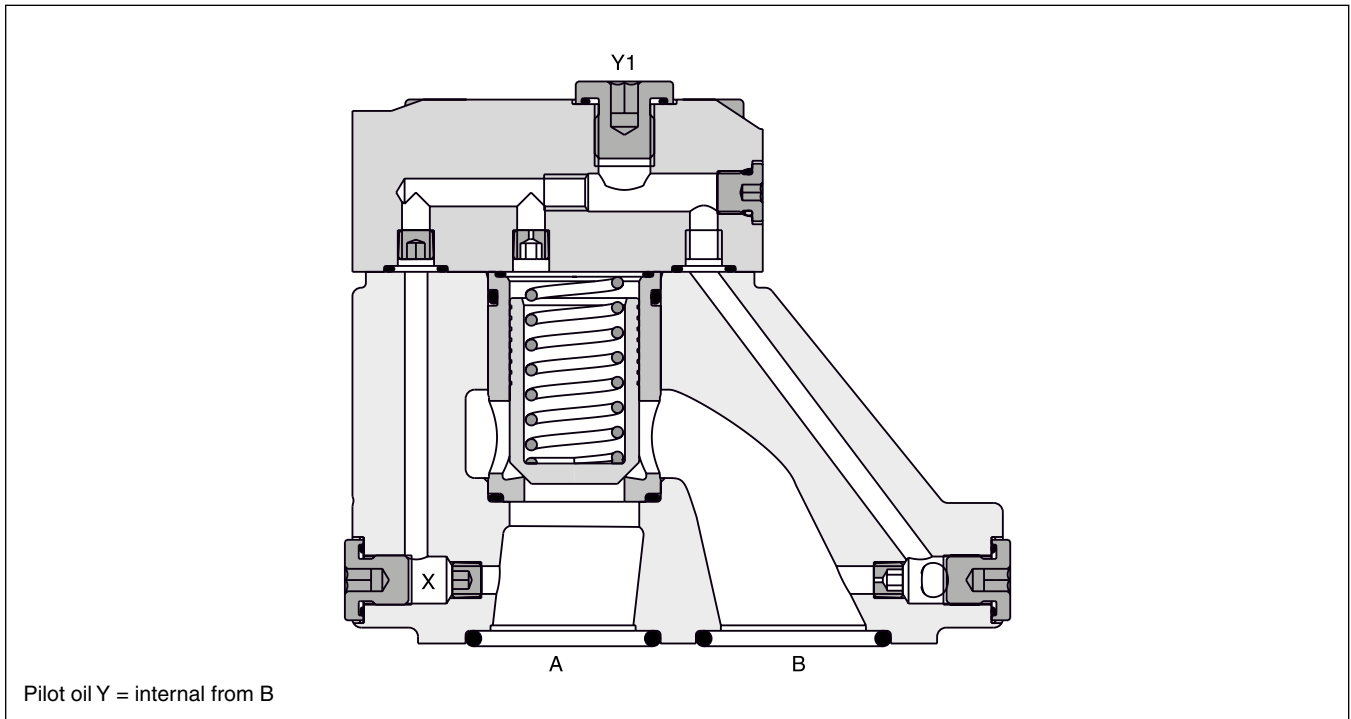

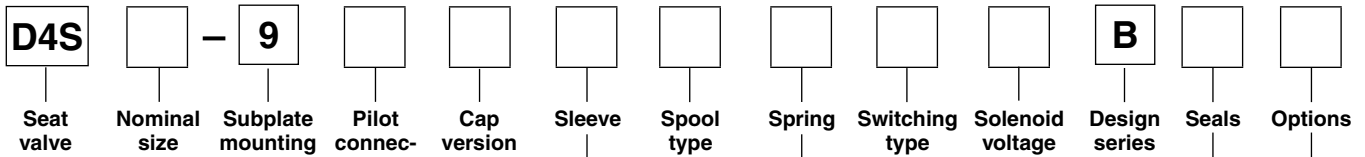

Code	Nominal size
03	NG10
06	NG25
10	NG32

Code	Pilot oil line in body	A-X B-Y	
		A-X	B-Y
1	internal from A	●	○
2	external from X	●	○
A ¹⁾	internal from A	●	●
B	external from X	●	●
C	internal from A + B	●	●
D	internal from B	●	●
G	external from Y	●	●

Code	Ports	X	Y	Z	X-Y	Y1	VV01
Standard							
1	Pilot oil = pilot drain	○	●	●	○	○	—
C	Pilot oil = pilot drain	●	○	●	○	○	—
With solenoid valve (VV01)							
2	Ext. PD from cap	○	○	●	●	○	●
5	Ext. to subplate	○	○	●	●	○	○
6	Internal pilot drain	○	○	●	●	○	○
With stroke limiter (not for D4S03)							
3	Pilot oil = pilot drain	●	●	—	—	—	—
4	Pilot oil = pilot drain	●	●	—	—	—	—

○ open bore ● closed bore ◐ orifice Ø 1.2

Code	Sleeve
1	AA = 95 %, AB = 5 %
3	AA = 60 %, AB = 40 %

Code	Size	Poppet type	Sleeve
1	03, 06, 10	With closed bottom and 15° chamfer (pZ max. = pA +20 bar)	1
2	03	With 0.8 dia. orifice at the bottom and 15° chamfer	1
	06, 10	With 1.2 dia. orifice at the bottom and 15° chamfer	1
4	03, 06, 10	With closed bottom and 45° chamfer	1, 3
A ²⁾	06, 10	Safety spool (for position control only)	3
B ²⁾	06, 10	Throttle spool, 10° chamfer	3
C ²⁾	06, 10	Throttle spool, 3° chamfer	3

Code	Spring (approx. cracking pressure [bar])					
	Sleeve Code 1		Sleeve Code 3			
	A → B	A → B	A → B	B → A	B → A	B → A
	D4S03	D4S06/10	D4S03	D4S06/10	D4S03	D4S06/10
1	2.8	3.5	6.5	6.5	9.5	11.0
2	0.5	0.5	1.0	1.0	1.5	1.7
3	0.3	0.3	0.6	0.6	0.9	1.0
4	2.2	2.2	4.0	3.5	5.5	6.0
5	—	9.0	—	16.0	—	28.0
6	1.2	1.2	2.0	2.2	3.0	3.8
7	3.0	—	8.0	—	12.0	—

Code	Options
omit	Standard
013	Cover for end position control

Code	Seals
1	NBR
5	FPM

Code	Solenoid voltage
omit	Standard w/o vent function
G0R	12 V=
G0Q	24 V=
GAR ⁴⁾	98 V=
GAG ⁴⁾	205 V=
W30	110 V / 50 Hz 120 V / 60 Hz
W31	230 V / 50 Hz 240 V / 60 Hz

Code	Switching type	
omit	Standard w/o vent function	
09	VV01 with manual override	de-energized: power comp. open
10	VV01 without manual override	de-energized: power comp. closed
11	VV01 with manual override	de-energized: power comp. closed
12	VV01 without manual override	de-energized: power comp. closed
CA	Shuttle valve	
DA	Shuttle valve	
CB	VV01 code 09 and shuttle valve code CA	
CD	VV01 code 11 and shuttle valve code CA	
DB	VV01 code 09 and shuttle valve code DA	
DD	VV01 code 11 and shuttle valve code DA	
BH	VV01 code 10 and shuttle valve code CA and position control ³⁾ with amplifier	
BK	VV01 code 12 and shuttle valve code CA and position control ³⁾ with amplifier	
BN	VV01 code 10 and shuttle valve code DA and position control ³⁾ with amplifier	
BQ	VV01 code 12 and shuttle valve code DA and position control ³⁾ with amplifier	
BC	VV01 code 10 and position control ³⁾ with amplifier	
BE	VV01 code 12 and position control ³⁾ with amplifier	
BA	Position control ³⁾ with amplifier	
BF	Position control ³⁾ with amplifier and shuttle valve code CA	
BL	Position control ³⁾ with amplifier and shuttle valve code DA	

Examples see end of chapter


¹⁾ With VV01 only.
²⁾ Springs 2, 3 and 6 only.
³⁾ Position control for D4S06/10 only. Spring 2 or 4. Spool A and sleeve 3. Valve open: proximity switch damped.
⁴⁾ To be used in combination with rectifier plugs at 120 VAC/230 VAC power supply.

Technical Data


General		NG10		NG25		NG32	
Size							
Mounting interface		Subplate mounting according to ISO 5781					
Mounting position		unrestricted					
Ambient temperature	[°C]	-20...+60					
MTTF _D value	[years]	150					
Weight	[kg]	2.7		4.5		6.0	
Hydraulic							
Operating pressure	[bar]	Ports A, B up to 350; Port Y 140 (with VV01)					
Nominal flow	[l/min]	180		360		600	
Fluid		Hydraulic oil according to DIN 51524					
Fluid temperature	[°C]	-20...+70 (NBR: -25...+70)					
Viscosity,	permitted	20...400					
	recommended	30...80					
Filtration		ISO 4406 (1999); 18/16/13					
Electrical (solenoid)							
Duty ratio		100 % ED; CAUTION: coil temperature up to 150 °C possible					
Protection class		IP65 in accordance with EN 60529 (with correctly mounted plug-in connector)					
Code		G0R	G0Q	GAR	GAG	W30	W31
Supply voltage	[V]	12 V =	24 V =	98 V =	205 V =	110 at 50 Hz 120 at 60 Hz	230 at 50 Hz 240 at 60 Hz
Tolerance supply voltage	[%]	±10	±10	±10	±10	±5	±5
Current consumption	hold	2.72	1.29	0.33	0.13	0.6 / 0.55	0.3 / 0.27
	in rush	2.72	1.29	0.33	0.13	2.5 / 2.4	1.25 / 1.2
Power consumption	hold	32.7	31	31.9	28.2	70 / 70 VA	70 / 70 VA
	in rush	32.7	31	31.9	28.2	280 / 290 VA	280 / 290 VA
Solenoid connection		Connector as per EN175301-803, solenoid identification as per ISO 9461					
Wiring min.	[mm ²]	3 x 1.5 recommended					
Wiring length max.	[m]	50 recommended					

6


D4S pilot configuration

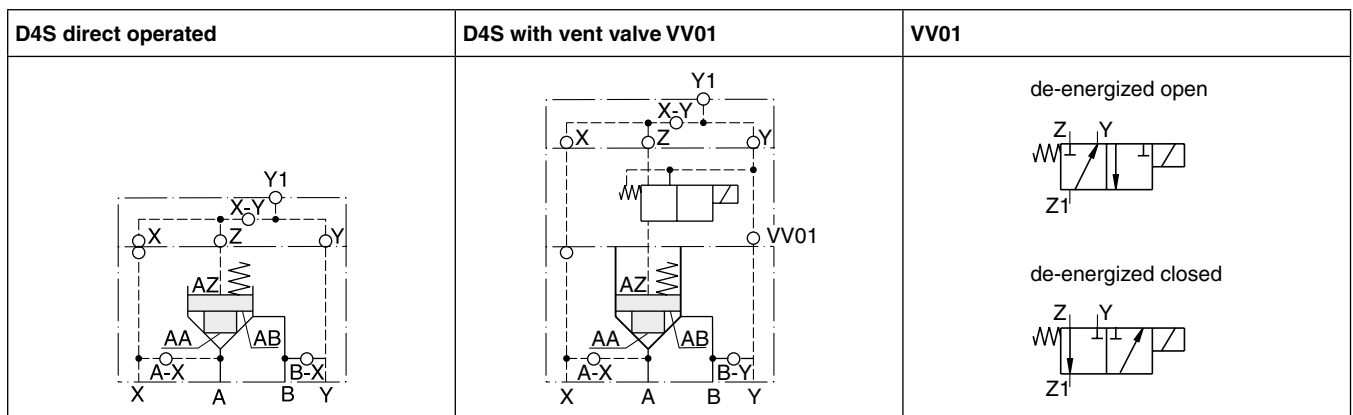

$\Delta p/Q$ performance curves

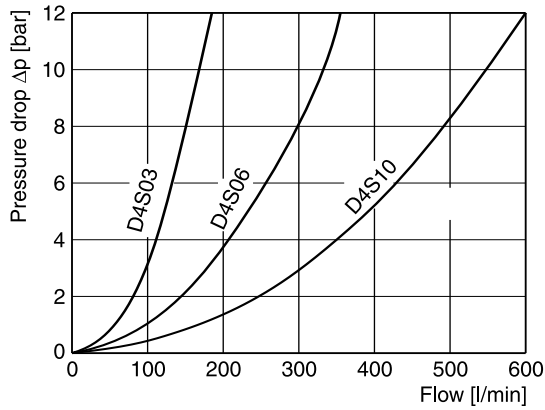

Leakage

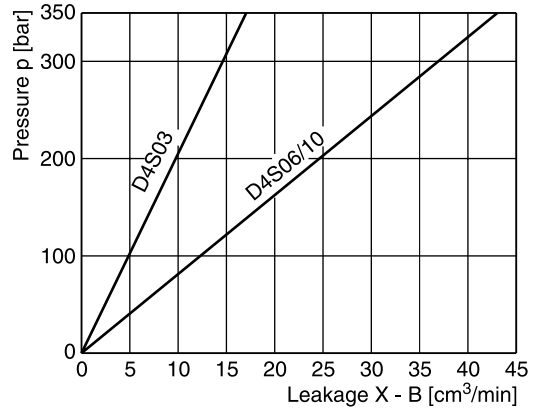


All characteristic curves measured with HLP46 at 50 °C.

Selection of Cartridges

Sleeve 1, poppet 1	Sleeve 1, poppet 2	Sleeve 1, poppet 4	Sleeve 3, poppet 4	Sleeve 3, poppet A	Sleeve 3, poppet B/C
Z	Z	Z	Z	Z	Z
A	A	A	A	A	A
1 : 1.05 $A_A = 0.95 A_C$ $A_B = 0.05 A_C$ 15° chamfer	1 : 1.05 $A_A = 0.95 A_C$ $A_B = 0.05 A_C$ 15° chamfer orifice	1 : 1.05 $A_A = 0.95 A_C$ $A_B = 0.05 A_C$ 45° chamfer	1 : 1.67 $A_A = 0.6 A_C$ $A_B = 0.4 A_C$ 45° chamfer	1 : 1.67 $A_A = 0.6 A_C$ $A_B = 0.4 A_C$ 45° chamfer safety spool	1 : 1.67 $A_A = 0.6 A_C$ $A_B = 0.4 A_C$ 45° chamfer throttle spool

Dimensions

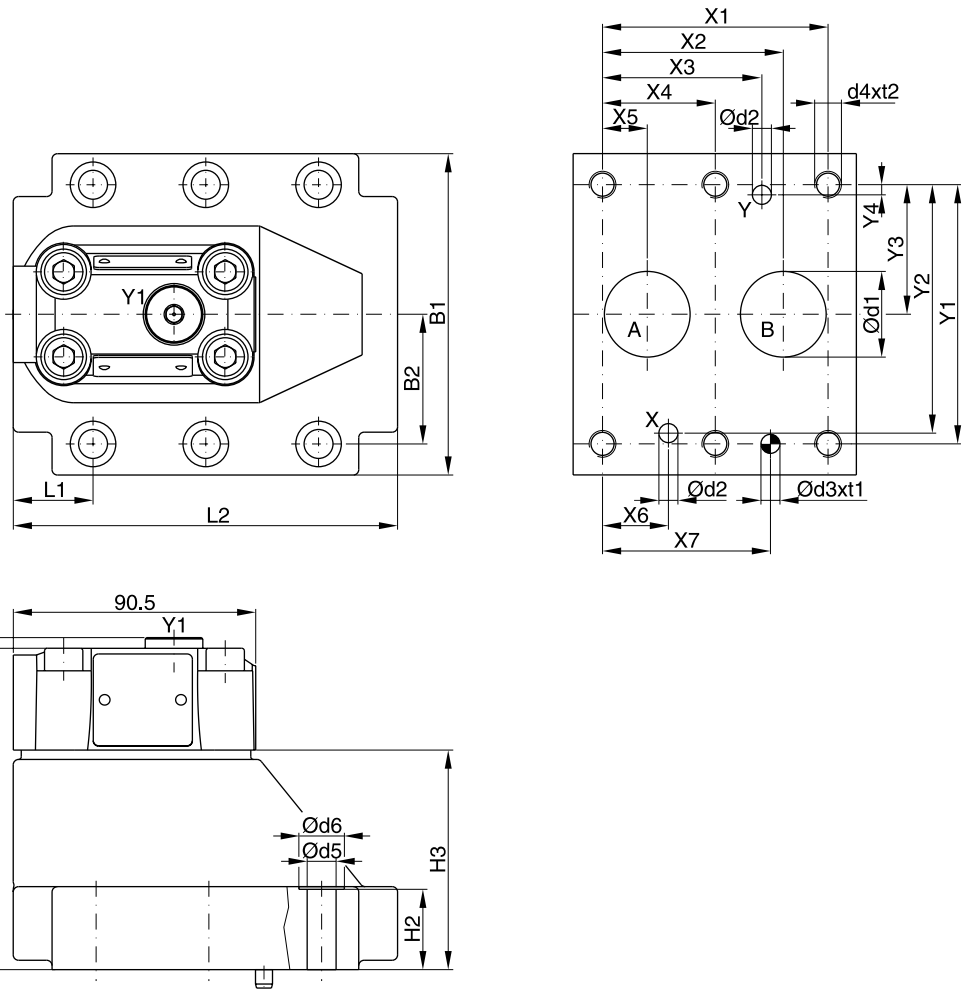

6



NG	ISO-code	X1	X2	X3	X4	X5	X6	X7	Y1	Y2	Y3	Y4
10	5781-06-07-0-00	42.9	35.8	21.5	-	7.2	21.5	31.8	66.7	58.8	33.4	7.9
25	5781-08-10-0-00	60.3	49.2	39.7	-	11.1	20.6	44.5	79.4	73	39.7	6.4
32	5781-10-13-0-00	84.2	67.5	59.5	42.1	16.7	24.6	62.7	96.8	92.8	48.4	3.8

NG	ISO-code	B1	B2	H1	H2	H3	L1	L2	D1	D2	D3	t1	D4	t2	D5	D6
10	5781-06-07-0-00	87.3	33.35	83	21	45	29	94.8	15	7	7.1	8	M10	16	10.8	17
25	5781-08-10-0-00	105	39.7	107.5	29	69.5	34.7	126.8	23.4	7.1	7.1	8	M10	18	10.8	17
32	5781-10-13-0-00	120	48.4	120	30	82	30.6	144.3	32	7.1	7.1	8	M10	20	10.8	17


NG	Kit	ISO 4762-12.9		Kit		Surface finish
				NBR	FPM	
10	BK505	4x M10x35	63 Nm ±15 %	S26-58507-0	S26-58507-5	
25	BK485	4x M10x45	63 Nm ±15 %	S26-58475-0	S26-58475-5	
32	BK506	6x M10x45	63 Nm ±15 %	S26-58508-0	S26-58508-5	

Dimensions

Dimensions D4S with VV01

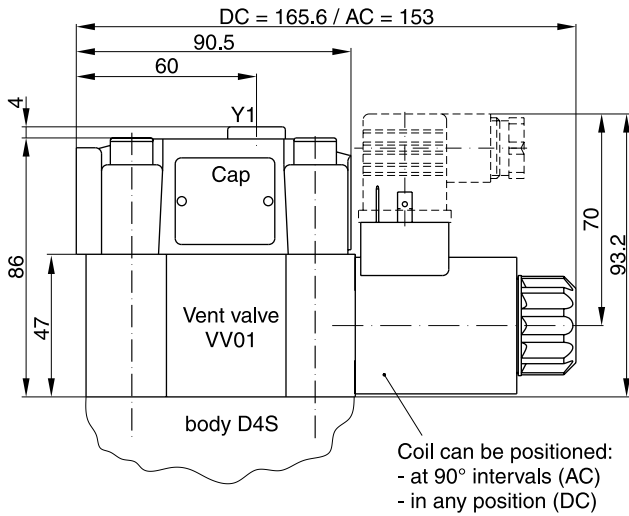






with manual override without manual override
D4S...09/10
Solenoid energized:
D4S blocked
Solenoid de-energized:
Flow from A-B or B-A



with manual override without manual override
D4S...11/12
Solenoid energized:
Flow from A-B or B-A
Solenoid de-energized:
D4S blocked



Dimensions D4S with shuttle valve

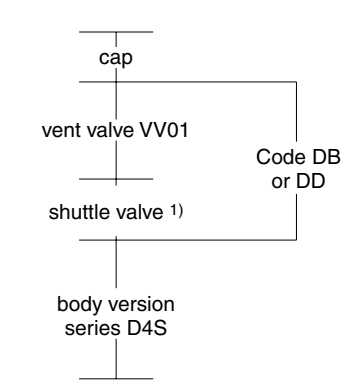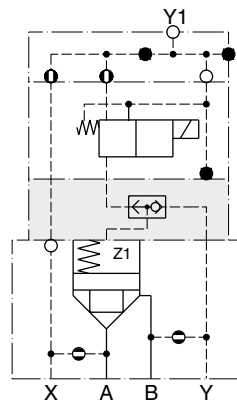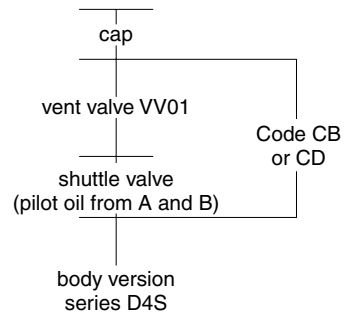
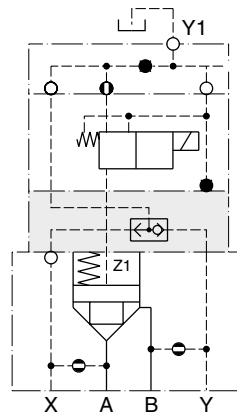
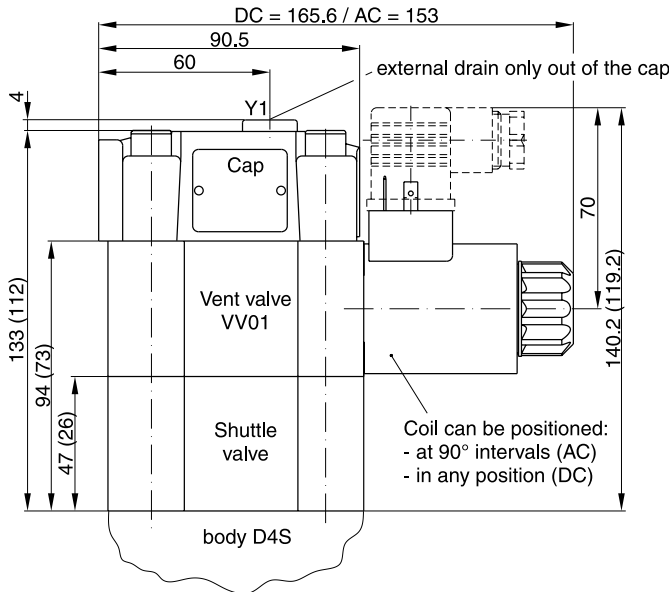


() Dimensions in brackets are for version VV01 with shuttle valve code DB or DD.

1) Pilot oil from A and B, from B to A check valve function.

Dimensions

Dimensions D4S position control

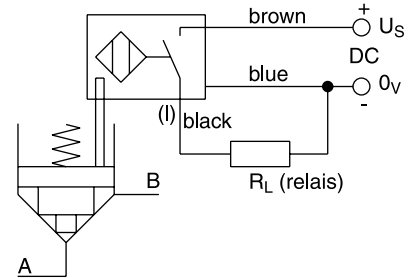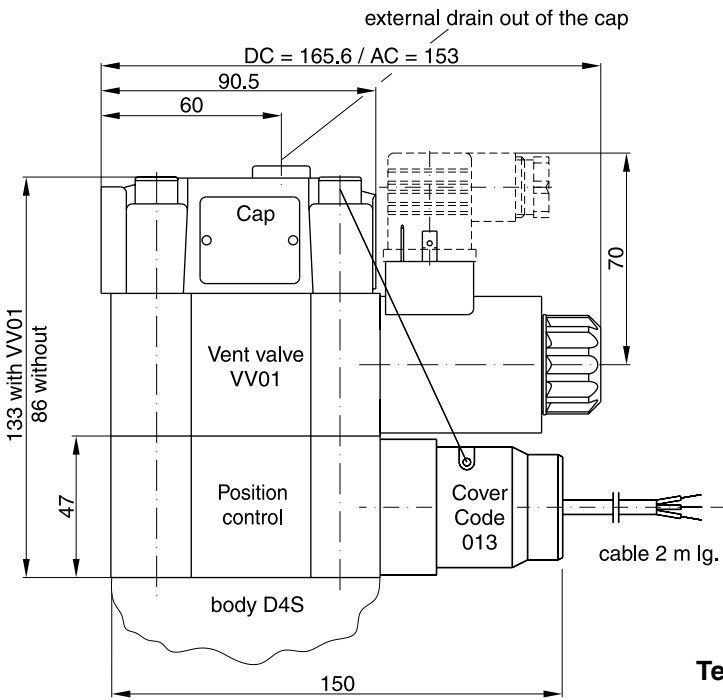

6

Position control by proximity switch (incl. amplifier)

Valve open: proximity switch activated.

This proximity switch is pressure proof and has no wear-ing parts.


Note

Position control for D4S06 and D4S10 only.

Technical data (proximity switch)

Function		PNP, contact
Supply voltage (Us)	[VDC]	10...30
Supply voltage ripple	[%]	≤ 10
Current consumption	[mA]	max. 8
Residual voltage L-signal	[V]	Us - 2.2 at I _{max}
Output current (I)	[mA]	≤ 200
Protection class		IP67
Ambient temperature	[C°]	-25...+70
Wire cross section	[mm ²]	3 x 0.5


Dimensions D4S stroke limiter

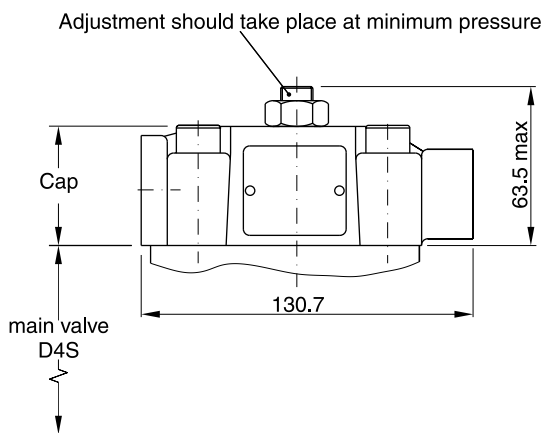


Note:

Stroke limiter not for use with D4S03, vent valve VV01, shuttle valve and position control.


Example: D4S⁰⁶₁₀-233B.



D4S direct operated




D4S..-DC
Pilot oil Y = internal from B




D4S..-21
Pilot oil X = external

D4S with VV01




D4S...16... } with VV01
09
10
11
12

Pilot oil X = internal from A
Drain Y = internal to B




D4S...26... } with VV01
09
10
11
12

Pilot oil X = external
Drain Y = internal to B



D4S...A5... } with VV01
09
10
11
12

Pilot oil X = internal from A
Drain Y = external to subplate




D4S...B5... } with VV01
09
10
11
12

Pilot oil X = external
Drain Y = external to subplate

6


Ordering Code Explanation (Examples)

D4S with VV01



D4S...-12... } with VV01
09
10
11
12


Pilot oil X = internal from A
Drain Y1 = external out of the cap



D4S...-22... } with VV01
09
10
11
12


Pilot oil X = external
Drain Y1 = external out of the cap

D4S with shuttle valve

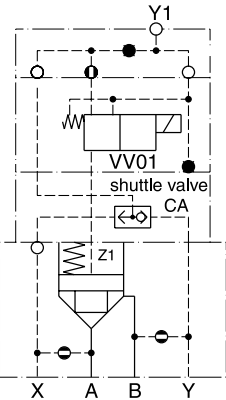


D4S...-C2... } with shuttle valve CA
CB } and VV01
CD }

Pilot oil = internal from A and B
Drain Y1 = external out of the cap

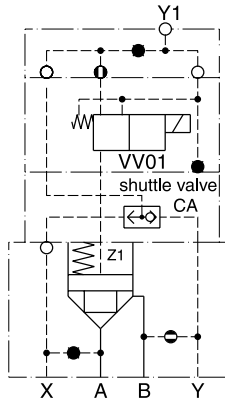


D4S...-D2... } with shuttle valve CA
CB } and VV01
CD }

Pilot oil = internal from B and
external from X
Drain Y1 = external out of the cap

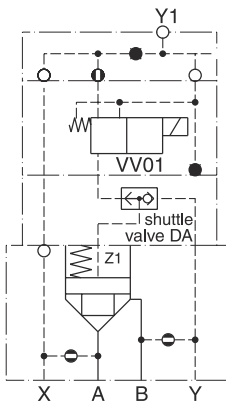

D4S...-C2...-DB } with shuttle valve DA
DD } and VV01


Pilot oil = internal from A and B
(B-A = check valve function)
Drain Y1 = external out of the cap

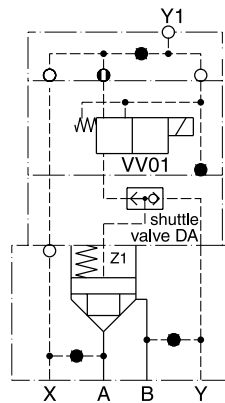

D4S...-B2... } with shuttle valve DA
DB } and VV01
DD }


Pilot oil = external from X and Y
Drain Y1 = external out of the cap

D4S with position control




D4S.-.113A.BA
(with position control)

Pilot oil X = internal from A




D4S.-.213A.BA
(with position control)

Pilot oil X = external

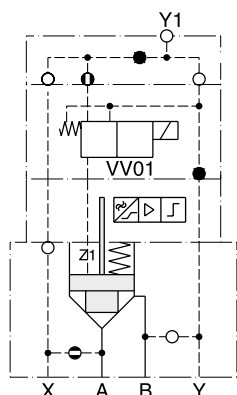

D4S.-.123A. BC } with position control
BE } and VV01


Pilot oil X = internal from A
Drain Y1 = external out of the cap

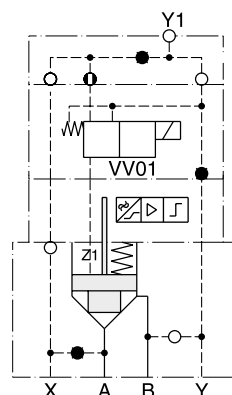

D4S.-.223A. BC } with position control
BE } and VV01


Pilot oil X = external
Drain Y1 = external out of the cap

D4S with stroke limiter



D4S.-.D434. with stroke limiter
Pilot oil Y = internal from B

Note: for D4S06 and D4S10 only



D4S.-.233B. with stroke limiter
Pilot oil X = external

Note: for D4S06 and D4S10 only

6